



Unidrive M600



High performance drive for induction and
sensorless permanent magnet motors

0.75 kW - 2.8 MW Heavy Duty (1.0 hp - 4,200 hp)
200 V | 400 V | 575 V | 690 V



CONTROL TECHNIQUES™

Nidec
All for dreams


Unidrive M

Optimized throughput, open automation systems, maximum ease of use

Led by the results of extensive customer-driven market research, we have tailored five Unidrive M feature-sets to specific application needs identified within industrial automation. The Unidrive M600 adds useful networking capability, additional I/O and improved motor control performance for open loop applications to the family. It also provides an easy upgrade for existing Commander SK users.



Unidrive M600 features

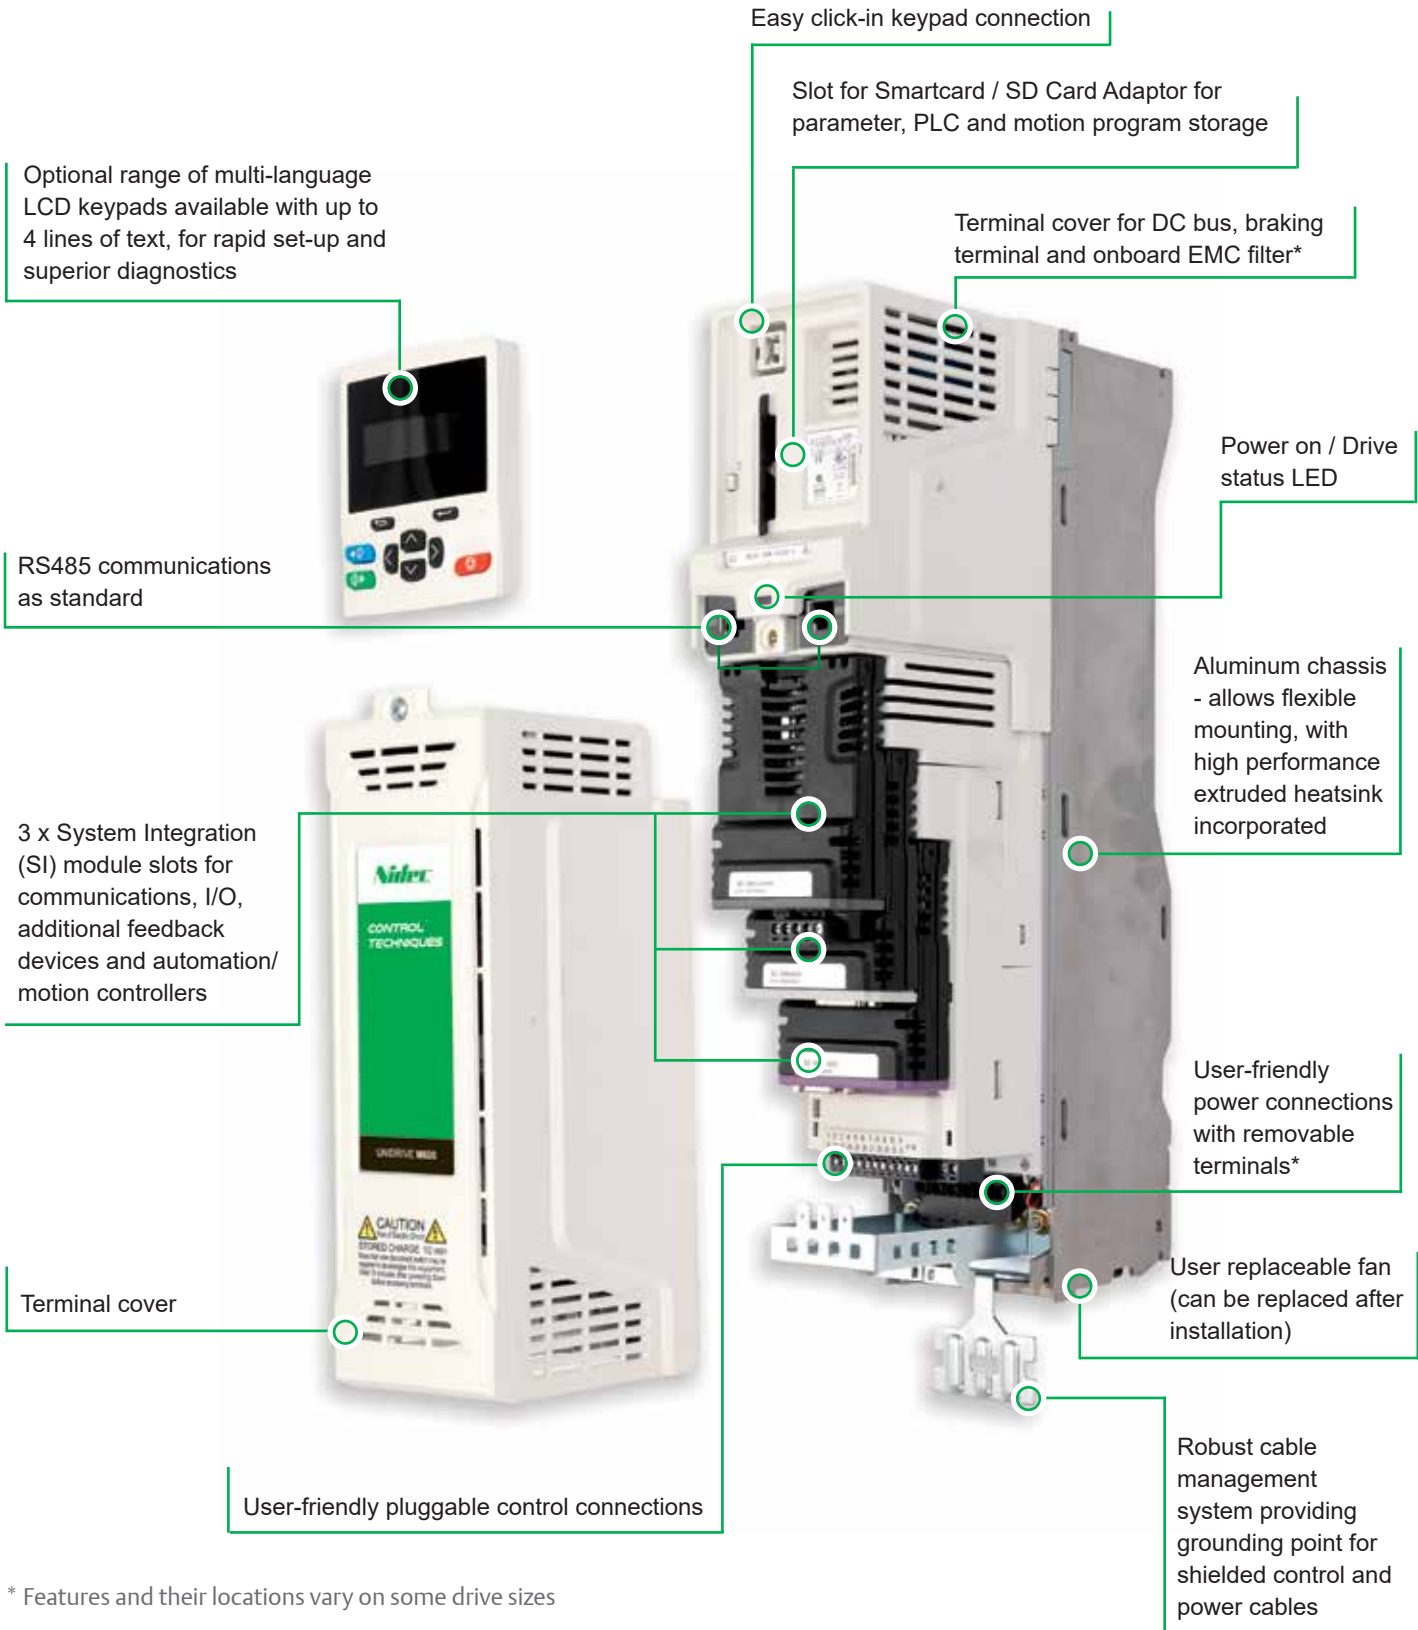

* Features and their locations vary on some drive sizes

High performance drive for induction and sensorless permanent magnet motors

The M600 is the perfect choice for applications that require high performance open-loop control of induction or permanent magnet motors. SI-Encoder / SI-Universal Encoder option modules are available for applications that require more precise closed loop velocity and digital lock / frequency following of induction motors.



Highly efficient permanent magnet motors from Leroy-Somer

Enhance throughput with high performance open-loop control of induction and permanent magnet motors

- Advanced Rotor Flux Control (RFC) algorithm gives maximum stability and control of induction and permanent magnet motors
- Up to 200% motor overload suitable for heavy industrial machinery applications

Reduce system costs by directly integrating with applications

- M600 incorporates an onboard PLC which can execute Machine Control Studio (IEC61131-3) programs for logic control, sequencing, speed following and digital lock - removing the need for additional PLCs
- Fit up to three SI modules to add safe motion, speed feedback, additional I/O and fieldbus communications



Energy efficiency

Unidrive M is designed to enhance the energy efficiency of all applications:

- Low power standby mode. In some applications, drives can sit idle for significant periods; Unidrive M's reduced standby power saves energy
- Easy common DC bus configuration enables braking energy to be recycled within the drive system, reducing energy usage and eliminating external supply components
- Unidrive M supports sensorless (open loop) control of compact high efficiency permanent magnet motors
- Active Front End for regenerative AC drive systems
- Dyneo®: perfectly synergized Permanent Magnet motor and Unidrive M solutions - optimized for performance and energy saving
- Dyneo® Unidrive M and Permanent Magnet motor solutions offer exceptional efficiency levels across all operating speeds, especially at lower speeds where the efficiency is much higher than induction motors
- Low losses, up to 98 % efficient




Machine Control Studio software

Unidrive M600's onboard PLC is programmed using Machine Control Studio which provides a flexible and intuitive environment for programming.

IEC 61131-3 automation programming

The programming environment is fully IEC 61131-3 compliant and therefore familiar, fast and easy to use for control engineers around the world.

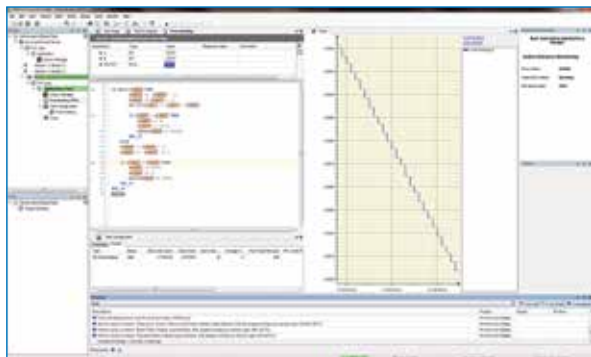

Typical Machine Control Studio Screen Shot

The following IEC 61131-3 programming languages are supported:

- Structured Text (ST)
- Function Block Diagram (FBD)
- Structured Function Chart (SFC)
- Ladder Diagram (LD)
- Instruction List (IL)

Also supported:

- Continuous Function Chart (CFC)

Intuitive IntelliSense functionality helps to write consistent and robust programs, speeding up software development.

Programmers have access to a vibrant open-source community for function blocks. Machine Control Studio also supports customers' own function block libraries, with on-line monitoring of program variables with user defined watch windows and help for on-line change of programs, in line with latest PLC practices.

Power System Flexibility

Unidrive M's unique motor control algorithms combined with the latest microprocessor technology ensure it offers the highest stability and bandwidth for all industrial motor types.

This enables users to maximize machine throughput in every application and with every motor, from standard AC induction motors to dynamic linear motors and from energy saving permanent magnet motors to high performance servo motors.



Motor control options available include:





| Control Mode | Features |
|--|---|
| Open loop vector or V/Hz induction motor control | Open loop motor control for induction motors. Easiest configuration. V/Hz can be used for multiple motor control. |
| Open loop Rotor Flux Control for induction motors (RFC-A) | Vector algorithm utilizing closed loop current control to greatly enhance performance for all induction motor sizes. |
| Open loop permanent magnet motor control (RFC-S) | Open loop control of compact, high efficiency, permanent magnet motors (including the Leroy-Somer Dyneo® LSRPM). |
| Closed loop Rotor Flux Control for induction motors (RFC-A)* | Speed and position control for induction motors, supporting a wide range of feedback devices (including quadrature, SinCos, EnDat 2.2, SSI encoders and resolvers). |
| Active Front End (AFE) for power quality and regeneration | Active Front End allows regeneration of energy back onto the power line. The Active Front End also provides power factor control for power quality management and greatly reduces unwanted power harmonics. |


*With SI-Encoder or SI-Universal Encoder option module

Fast and Easy access for Commissioning, Monitoring and Diagnostics

User interface options

Unidrive M600 benefits from a number of keypad choices to meet your application needs. Unidrive M600 is quick and easy to set-up. The drives may be configured using a selection of keypads, SD or Smartcard or the supplied commissioning software that guides the user through the configuration process.

| Type | | Benefit |
|-------------------|---|--|
| KI-Keypad |  | Plain text, multi-language LCD keypad with up to 4 lines of text for in depth parameter and data descriptions, for an enhanced user experience. |
| KI-Keypad RTC |  | All the features of the KI-Keypad, but with battery operated real-time clock, allowing accurate time stamping of events and aiding quick resolution. |
| Remote Keypad |  | Remote mountable keypad. This allows flexible mounting on the outside of a panel and meets IP66 (NEMA 4). |
| Remote keypad RTC |  | The keypad is remote mountable, allowing flexible mounting on the outside of a panel (meets IP54/ NEMA 12). Three line plain text, multi-language LCD keypad for rapid set-up and helpful diagnostics. Battery operated real-time clock allows accurate time stamping of events, aiding diagnostics. |

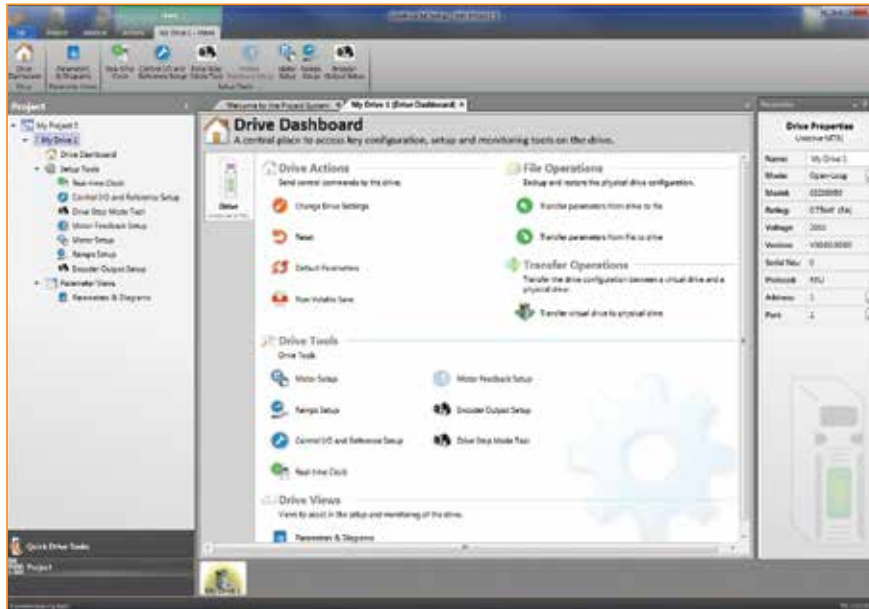

Unidrive M drive and motor set-up tool screen

Unidrive M Connect commissioning tool

The Unidrive M Connect PC tool is for commissioning, optimizing and monitoring drive/system performance. Its development draws from extensive user research, using human centered design principles to give the ultimate user experience:

- Task-based drive operations are simplified with intuitive graphical tools in a familiar Windows environment
- Dynamic drive logic diagrams and enhanced searchable listings
- Drive and motor performance can be optimized with minimal specialized drive knowledge
- Tool is scalable to match application requirements
- Supports the import of Unidrive SP parameter files and allows full drive cloning (i.e. parameter sets and application programs)
- Matching Unidrive M to Nidec motors (such as Dyneo®) can be achieved quickly and easily using Unidrive M Connect's motor database
- Multiple communications channels for a more complete overview of the system
- Drive discovery gives the ability to find drives on a network automatically without the user having to specify their addresses

Unidrive M's portable memory devices

Smartcard

Smartcards can be used to back-up parameter sets and basic PLC programs, as well as copying them from one drive to another, including from a Unidrive SP:

- Simplified drive maintenance and commissioning
- Quick set-up for sequential build of machines
- Upgrades to be stored on a Smartcard and sent to the customer for installation

SD card

Standard SD cards can be used for quick and easy parameter and program storage using an adaptor. SD cards provide a huge memory capability allowing a system reload if required, and can be easily preprogrammed on a common PC.

Control Mode

Open loop vector or V/Hz induction motor control
 Open loop Rotor Flux Control for induction motors (RFC-A)



Open loop permanent magnet motor control (RFC-S)



Closed loop Rotor Flux Control for induction motors (RFC-A)*



*With Encoder option

Active Front End (AFE) power quality converter



Optional Drive Programming and Operator Interface

Unidrive M Connect



KI-Keypad



KI-Keypad RTC



Remote Keypad



Remote keypad RTC



Smartcard



SD Card using SD Card Adaptor



KI-485 Adaptor



Input/Output

SI-I/O



4 x Digital I/O
 3 x Analog input (default) / Digital input
 1 x Analog output (default) / Digital input
 2 x Relay

Onboard



Analog I/O
 Digital I/O including 2 x high speed I/O [250 µs]
 Relay output
 STO



Applications with PLC Functionality

Standard

Easy to use onboard PLC using industry standard IEC 61131-3 programming environment



Communications

Onboard

RS485



SI-EtherCAT



SI-PROFIBUS



SI-Ethernet



SI-DeviceNet



SI-CANopen



SI-PROFINET



Feedback

SI-Encoder



SI-Universal Encoder



Safety

SI-Safety




DC back-up power supply

24 - 1067 Vdc power



24 Vdc control



Unidrive M600 ratings and specifications

| 200/240 Vac $\pm 10\%$ | | | | | | |
|------------------------|----------------------------|------------------------|------------------------|----------------------------|------------------------|------------------------|
| Drive | Heavy Duty | | | Normal Duty | | |
| | Max Continuous Current (A) | Motor Shaft Power (kW) | Motor Shaft Power (hp) | Max Continuous Current (A) | Motor Shaft Power (kW) | Motor Shaft Power (hp) |
| M600-03200050A | 5 | 0.75 | 1 | 6.6 | 1.1 | 1.5 |
| M600-03200066A | 6.6 | 1.1 | 1.5 | 8 | 1.5 | 2 |
| M600-03200080A | 8 | 1.5 | 2 | 11 | 2.2 | 3 |
| M600-03200106A | 10.6 | 2.2 | 3 | 12.7 | 3 | 3 |
| M600-04200137A | 13.7 | 3 | 3 | 18 | 4 | 5 |
| M600-04200185A | 18.5 | 4 | 5 | 25 | 5.5 | 7.5 |
| M600-05200250A | 25 | 5.5 | 7.5 | 30 | 7.5 | 10 |
| M600-06200330A | 33 | 7.5 | 10 | 50 | 11 | 15 |
| M600-06200440A | 44 | 11 | 15 | 58 | 15 | 20 |
| M600-07200610A | 61 | 15 | 20 | 75 | 18.5 | 25 |
| M600-07200750A | 75 | 18.5 | 25 | 94 | 22 | 30 |
| M600-07200830A | 83 | 22 | 30 | 117 | 30 | 40 |
| M600-08201160A | 116 | 30 | 40 | 149 | 37 | 50 |
| M600-08201320A | 132 | 37 | 50 | 180 | 45 | 60 |
| M600-09201760A | 176 | 45 | 60 | 216 | 55 | 75 |
| M600-09202190A | 219 | 55 | 75 | 266 | 75 | 100 |
| M600-09201760E | 176 | 45 | 60 | 216 | 55 | 75 |
| M600-09202190E | 219 | 55 | 75 | 266 | 75 | 100 |
| M600-10202830E | 283 | 75 | 100 | 325 | 90 | 125 |
| M600-10203000E | 300 | 90 | 125 | 360 | 110 | 150 |

| 380/480 Vac $\pm 10\%$ | | | | | | |
|------------------------|----------------------------|------------------------|------------------------|----------------------------|------------------------|------------------------|
| Drive | Heavy Duty | | | Normal Duty | | |
| | Max Continuous Current (A) | Motor Shaft Power (kW) | Motor Shaft Power (hp) | Max Continuous Current (A) | Motor Shaft Power (kW) | Motor Shaft Power (hp) |
| M600-03400025A | 2.5 | 0.75 | 1 | 3.4 | 1.1 | 1.5 |
| M600-03400031A | 3.1 | 1.1 | 1.5 | 4.5 | 1.5 | 2 |
| M600-03400045A | 4.5 | 1.5 | 2 | 6.2 | 2.2 | 3 |
| M600-03400062A | 6.2 | 2.2 | 3 | 7.7 | 3 | 5 |
| M600-03400078A | 7.8 | 3 | 5 | 10.4 | 4 | 5 |
| M600-03400100A | 10 | 4 | 5 | 12.3 | 5.5 | 7.5 |
| M600-04400150A | 15 | 5.5 | 10 | 18.5 | 7.5 | 10 |
| M600-04400172A | 17.2 | 7.5 | 10 | 24 | 11 | 15 |
| M600-05400270A | 27 | 11 | 20 | 30 | 15 | 20 |
| M600-05400300A | 30 | 15 | 20 | 31 | 15 | 20 |
| M600-06400350A | 35 | 15 | 25 | 38 | 18.5 | 25 |
| M600-06400420A | 42 | 18.5 | 30 | 48 | 22 | 30 |
| M600-06400470A | 47 | 22 | 30 | 63 | 30 | 40 |
| M600-07400660A | 66 | 30 | 50 | 79 | 37 | 50 |
| M600-07400770A | 77 | 37 | 60 | 94 | 45 | 60 |
| M600-07401000A | 100 | 45 | 75 | 112 | 55 | 75 |
| M600-08401340A | 134 | 55 | 100 | 155 | 75 | 100 |
| M600-08401570A | 157 | 75 | 125 | 184 | 90 | 125 |
| M600-09402000A | 200 | 90 | 150 | 221 | 110 | 150 |
| M600-09402240A | 224 | 110 | 150 | 266 | 132 | 200 |
| M600-09402000E | 200 | 90 | 150 | 221 | 110 | 150 |
| M600-09402240E | 224 | 110 | 150 | 266 | 132 | 200 |
| M600-10402700E | 270 | 132 | 200 | 320 | 160 | 250 |
| M600-10403200E | 320* | 160 | 250 | 361 | 200 | 300 |
| M600-11403770E | 377 | 185 | 300 | 437 | 225 | 350 |
| M600-11404170E | 417* | 200 | 350 | 487* | 250 | 400 |
| M600-11404640E | 464* | 250 | 400 | 507* | 280 | 450 |

*At 2 kHz switching frequency

| 500/575 Vac ±10% | | | | | | |
|------------------|----------------------------|------------------------|------------------------|----------------------------|------------------------|------------------------|
| Drive | Heavy Duty | | | Normal Duty | | |
| | Max Continuous Current (A) | Motor Shaft Power (kW) | Motor Shaft Power (hp) | Max Continuous Current (A) | Motor Shaft Power (kW) | Motor Shaft Power (hp) |
| M600-05500030A | 3 | 1.5 | 2 | 3.9 | 2.2 | 3 |
| M600-05500040A | 4 | 2.2 | 3 | 6.1 | 4 | 5 |
| M600-05500069A | 6.9 | 4 | 5 | 10 | 5.5 | 7.5 |
| M600-06500100A | 10 | 5.5 | 7.5 | 12 | 7.5 | 10 |
| M600-06500150A | 15 | 7.5 | 10 | 17 | 11 | 15 |
| M600-06500190A | 19 | 11 | 15 | 22 | 15 | 20 |
| M600-06500230A | 23 | 15 | 20 | 27 | 18.5 | 25 |
| M600-06500290A | 29 | 18.5 | 25 | 34 | 22 | 30 |
| M600-06500350A | 35 | 22 | 30 | 43 | 30 | 40 |
| M600-07500440A | 44 | 30 | 40 | 53 | 37 | 50 |
| M600-07500550A | 55 | 37 | 50 | 73 | 45 | 60 |
| M600-08500630A | 63 | 45 | 60 | 86 | 55 | 75 |
| M600-08500860A | 86 | 55 | 75 | 108 | 75 | 100 |
| M600-09501040A | 104 | 75 | 100 | 125 | 90 | 125 |
| M600-09501310A | 131 | 90 | 125 | 150 | 110 | 150 |
| M600-09501040E | 104 | 75 | 100 | 125 | 90 | 125 |
| M600-09501310E | 131 | 90 | 125 | 150 | 110 | 150 |
| M600-10501520E | 152 | 110 | 150 | 200 | 130 | 200 |
| M600-10501900E | 190 | 132 | 200 | 200 | 150 | 200 |
| M600-11502000E | 200 | 150 | 200 | 248 | 185 | 250 |
| M600-11502540E | 254* | 185 | 250 | 288* | 225 | 300 |
| M600-11502850E | 285* | 225 | 300 | 315* | 250 | 350 |

| 690 Vac ±10% | | | | | | |
|----------------|----------------------------|------------------------|------------------------|----------------------------|------------------------|------------------------|
| Drive | Heavy Duty | | | Normal Duty | | |
| | Max Continuous Current (A) | Motor Shaft Power (kW) | Motor Shaft Power (hp) | Max Continuous Current (A) | Motor Shaft Power (kW) | Motor Shaft Power (hp) |
| M600-07600190A | 19 | 15 | 20 | 23 | 18.5 | 25 |
| M600-07600240A | 24 | 18.5 | 25 | 30 | 22 | 30 |
| M600-07600290A | 29 | 22 | 30 | 36 | 30 | 40 |
| M600-07600380A | 38 | 30 | 40 | 46 | 37 | 50 |
| M600-07600440A | 44 | 37 | 50 | 52 | 45 | 60 |
| M600-07600540A | 54 | 45 | 60 | 73 | 55 | 75 |
| M600-08600630A | 63 | 55 | 75 | 86 | 75 | 100 |
| M600-08600860A | 86 | 75 | 100 | 108 | 90 | 125 |
| M600-09601040A | 104 | 90 | 125 | 125 | 110 | 150 |
| M600-09601310A | 131 | 110 | 150 | 155 | 132 | 175 |
| M600-09601040E | 104 | 90 | 125 | 125 | 110 | 150 |
| M600-09601310E | 131 | 110 | 150 | 155 | 132 | 175 |
| M600-10601500E | 150 | 132 | 175 | 172 | 160 | 200 |
| M600-10601780E | 178 | 160 | 200 | 197 | 185 | 250 |
| M600-11602100E | 210 | 185 | 250 | 225 | 200 | 250 |
| M600-11602380E | 238* | 200 | 250 | 275* | 250 | 300 |
| M600-11602630E | 263* | 250 | 300 | 305* | 280 | 400 |

*At 2 kHz switching frequency

Unidrive M600 ratings and specifications

Environmental safety and electrical conformance

- IP20 / NEMA1 / UL TYPE 1 (UL open class as standard, additional kit needed to achieve Type 1)
- IP65 / NEMA4 / UL TYPE 12 rating is achieved on the rear of the drive when through panel mounted
- Frames 9, 10 & 11 achieve IP55 / NEMA4 / UL TYPE 12 rating on the rear of the drive when through panel mounted
- Ambient temperature -20 °C to 40 °C as standard. Up to 55 °C with derating
- Humidity 95 % maximum (non-condensing) at 40 °C
- Altitude: 0 to 3000m, derate 1 % per 100 m between 1000 m and 3000 m
- Random Vibration: Tested in accordance with IEC 60068-2-64
- Mechanical Shock Tested in accordance with IEC 60068-2-29
- Storage temperature: -40 °C to 70 °C short term, -40 °C to 50 °C long term
- Electromagnetic Immunity complies with EN 61800-3 and EN 61000-6-2
- With onboard EMC filter, complies with EN 61800-3 (2nd environment)
- EN 61000-6-3 and EN 61000-6-4 with optional footprint EMC filter
- IEC 61800-5-1 (Electrical Safety)
- IEC 61131-2 I/O
- Safe Torque Off, independently assessed by TÜV to IEC 61800-5-2 SIL 3 and EN ISO 13849-1 PL
- UL 508C (Electrical Safety)

Unidrive M600 feature and specification table

| | |
|-------------------------|--|
| Performance | Current loop update: 62 µs |
| | Heavy Duty peak rating: 200 % (3s) |
| | Maximum output frequency: 550 Hz |
| | Switching frequency range: 2, 3, 4, 6, 8, 12, 16 kHz (3 kHz default) |
| Onboard intelligence | Programmable Logic Control (PLC) |
| | Real-time tasks |
| | Digital lock control |
| Onboard comms | RS485 |
| Mechanical attributes | Tile mounting on sizes 3, 4, 5 |
| | Common DC bus connections on sizes 3, 4, 5, 6 |
| Parameter back-up | Serial port cloning |
| | SD card (using SD Card Adaptor) |
| | Smartcard reader support |
| Feedback | Optional SI-Encoder/SI-Universal Encoder |
| Onboard I/O | 3 x Analog input, 2 x Analog output |
| | 4 x Digital input, 1 x Digital output, 3 x Bidirectional digital input or output |
| | 1 x Relay output |
| | 1 x Safe Torque Off (STO) terminal |
| Power and motor control | Stationary autotune for permanent magnet motors |
| | Wide operating range back-up DC supply |
| | 24 V control back-up |
| Other | Temperature controlled fan operation with user adjustable speed limit |
| | User replaceable fan(s) |
| | Conformal coating |
| | Standby mode (energy saving) |

Optional media and accessories

| Description | Order code |
|-------------------|--------------|
| SD Card Adaptor | 3130-1212-03 |
| Smartcard (64 kB) | 2214-1006-03 |

Internal brake resistor

| Frame size | Order code |
|------------|------------|
| 3 | 1220-2752 |
| 4 & 5 | 1299-0003 |

DC bus paralleling kit

| Frame size | Order code |
|------------------------------|------------|
| 3 | 3470-0048 |
| 4 | 3470-0061 |
| 5 | 3470-0068 |
| 6 | 3470-0063 |
| 6 (connect to frame 3,4 & 5) | 3470-0111 |

Unidrive M operating modes

| Operating mode | RFC from cold | RFC from 100 % | Open loop from cold | Open loop from 100 % |
|---|-----------------|----------------|---------------------|----------------------|
| Normal duty overload with motor rated current = drive rated current | 110 % for 165 s | 110 % for 9 s | 110 % for 165 s | 110 % for 9 s |
| Heavy duty overload with motor rated current = drive rated current (size 8 and below) | 200 % for 28 s | 200 % for 3 s | 150 % for 60 s | 150 % for 7 s |
| Heavy duty overload with motor rated current = drive rated current (size 9E and 10) | 175 % for 42 s | 175 % for 5 s | 150 % for 60 s | 150 % for 7 s |

Tile mount kit

| Frame size | Order code |
|------------|------------|
| 3 | 3470-0049 |
| 4 | 3470-0060 |
| 5 | 3470-0073 |

Through hole IP65 kit

| Frame size | Order code |
|--------------|------------|
| 3 | 3470-0053 |
| 4 | 3470-0056 |
| 5 | 3470-0067 |
| 6 | 3470-0055 |
| 7 | 3470-0079 |
| 8 | 3470-0083 |
| 9E & 10 | 3470-0105 |
| 10 Inverter | 3470-0108 |
| 10 Rectifier | 3470-0106 |
| 11 | 3470-0123 |

UL Type 1 Conduit kit

| Frame size | Order code |
|------------|------------|
| 3 & 4 | 6521-0071 |
| 5 | 3470-0069 |
| 6 | 3470-0059 |
| 7 | 3470-0080 |
| 8 | 3470-0088 |
| 9E & 10 | 3470-0115 |
| 11 | 3470-0136 |

Retrofit brackets

To allow Unidrive M drives to be fitted in existing Unidrive SP surface mount installations.

| Frame size | Order code |
|------------|------------|
| 4 | 3470-0062 |
| 5 | 3470-0066 |
| 6 | 3470-0074 |
| 7 | 3470-0078 |
| 8 | 3470-0087 |
| 9E & 10 | 3470-0118 |

Cable grommet kit

| Frame size | Order code |
|------------------|------------|
| 7 | 3470-0086 |
| 8 - Single cable | 3470-0089 |
| 8 - Dual cable | 3470-0090 |
| 9E & 10 | 3470-0107 |

General kit items

| Item | Order code |
|--|------------|
| Keypad blanking cover (10 pieces in pack) | 3470-0058 |
| Frame size 3 & 4 power connector split kit | 3470-0064 |
| I/O commissioning extender adaptor | 3000-0009 |

** To allow multiple drives to be through hole mounted with no space between them.

Optional external EMC filters

Unidrive M built-in EMC filter complies with EN 61800-3. External EMC filters are required for compliance with EN 61000-6-4.

| Frame size | Voltage | Order code |
|------------|---------------|------------|
| 3 | 200 V | 4200-3230 |
| | 400 V | 4200-3480 |
| 4 | 200 V | 4200-0272 |
| | 400 V | 4200-0252 |
| 5 | 200 V | 4200-0312 |
| | 400 V | 4200-0402 |
| | 575 V | 4200-0122 |
| 6 | 200 V | 4200-2300 |
| | 400 V | 4200-4800 |
| | 575 V | 4200-3690 |
| 7 | 200 V & 400 V | 4200-1132 |
| | 575 V & 690 V | 4200-0672 |
| 8 | 200 V & 400 V | 4200-1972 |
| | 575 V & 690 V | 4200-1662 |
| 9 | 200 V & 400 V | 4200-3021 |
| | 575 V & 690 V | 4200-1660 |
| 9E & 10 | 200 V & 400 V | 4200-4460 |
| | 575 V & 690 V | 4200-2210 |
| 11 | 400 V | 4200-0400 |
| | 575 V & 690 V | 4200-0690 |

For a full list of patents and patent applications, visit www.controltechniques.com/patents.

Unidrive M frame sizes and ratings

SINGLE DRIVES



| Frame size | | 3 | 4 | 5 | 6 | 7 | 8 | | |
|-------------------------------------|----------|-----------------------------------|------------------------------|--------------------------------|------------------------------------|----------------------------------|------------------------------------|-----|--|
| Frame sizes available | M600 | • | • | • | • | • | • | | |
| Dimensions (H x W x D) | mm | 365 x 83 x 200 | 365 x 124 x 200 | 365 x 143 x 202 | 365 x 210 x 227 | 508 x 270 x 280 | 753 x 310 x 290 | | |
| | in | 14.4 x 3.3 x 7.9 | 14.4 x 4.9 x 7.9 | 14.4 x 5.6 x 8 | 14.4 x 8.3 x 8.9 | 20 x 10.6 x 11.0 | 29.7 x 12.2 x 11.4 | | |
| Weight | kg (lb) | 4.5 (9.9) Max | 6.5 (14.3) | 7.4 (16.3) | 14 (30.9) | 28 (61.7) | 52 (114.6) | | |
| DC Bus Choke/ AC Line Choke | Internal | •* | • | • | • | • | • | | |
| | External | | | | | | | | |
| Max Continuous Heavy Duty kW Rating | @ 100 V | | | | | | | N/A | |
| | @ 200 V | 0.75 kW - 2.2 kW (1 hp - 3 hp) | 3 kW - 4 kW (3 hp - 5 hp) | 5.5 kW (7.5 hp) | 7.5 kW - 11 kW (10 hp - 15 hp) | 15 kW - 22 kW (20 hp - 30 hp) | 30 kW - 37 kW (40 hp - 50 hp) | | |
| | @ 400 V | 0.75 kW - 4 kW (1 hp - 5 hp) | 5.5 kW - 7.5 kW (10 hp) | 11 kW - 15 kW (20 hp) | 15 kW - 22 kW (25 hp - 30 hp) | 30 kW - 45 kW (50 hp - 75 hp) | 55 kW - 75 kW (100 hp - 125 hp) | | |
| | @ 575 V | N/A | | 1.5 kW - 4 kW (2 hp - 5 hp) | 5.5 kW - 22 kW (7.5 hp - 30 hp) | 30 kW - 37 kW (40 hp - 50 hp) | 45 kW - 55 kW (60 hp - 75 hp) | | |
| | @ 690 V | N/A | | | | 15 kW - 45 kW (20 hp - 60 hp) | 55 kW - 75 kW (75 hp - 100 hp) | | |

*except 03200050 and 03400062 ratings

Sizes do not include removable mounting brackets




| | 9A | 9E | 10E | 11E |
|--|-------------------------------------|-------------------------------------|--------------------------------------|--------------------------------------|
| | • | • | • | • |
| | 1049 x 310 x 288 | 1010 x 310 x 288 | 1010 x 310 x 288 | 1190 x 310 x 312 |
| | 41.3 x 12.2 x 11.4 | 41.3 x 12.2 x 11.4 | 41.3 x 12.2 x 11.4 | 46.9 x 12.2 x 12.3 |
| | 66.5 (146.6) | 46 (101.4) | 46 (101.4) | 63 (138.9) |
| | • | | | |
| | | • | • | • |
| | | | | |
| | 45 kW - 55 kW (60 hp - 75 hp) | 45 kW - 55 kW (60 hp - 75 hp) | 75 kW - 90 kW (100 hp - 125 hp) | N/A |
| | 90 kW - 110 kW (150 hp) | 90 kW - 110 kW (150 hp) | 132 kW - 160 kW (200 hp - 250 hp) | 185 kW - 250 kW (300 hp - 400 hp) |
| | 75 kW - 90 kW (100 hp - 125 hp) | 75 kW - 90 kW (100 hp - 125 hp) | 110 kW - 132 kW (150 hp - 200 hp) | 150 kW - 225 kW (200 hp - 300 hp) |
| | 90 kW - 110 kW (125 hp - 150 hp) | 90 kW - 110 kW (125 hp - 150 hp) | 132 kW - 160 kW (175 hp - 200 hp) | 185 kW - 250 kW (250 hp - 300 hp) |

Unidrive M: High Power Modular AC Drives


Highly reliable drive modules, flexible system design and rapid global support

Unidrive M600 | Unidrive M700/ M701/ M702
90 kW to 2.8 MW / 125 to 4,200 hp
200 V | 400 V | 575 V | 690 V

For information on our high power Unidrive M modules (90 kW - 2.8 MW) refer to the Unidrive M high power brochure - available online.

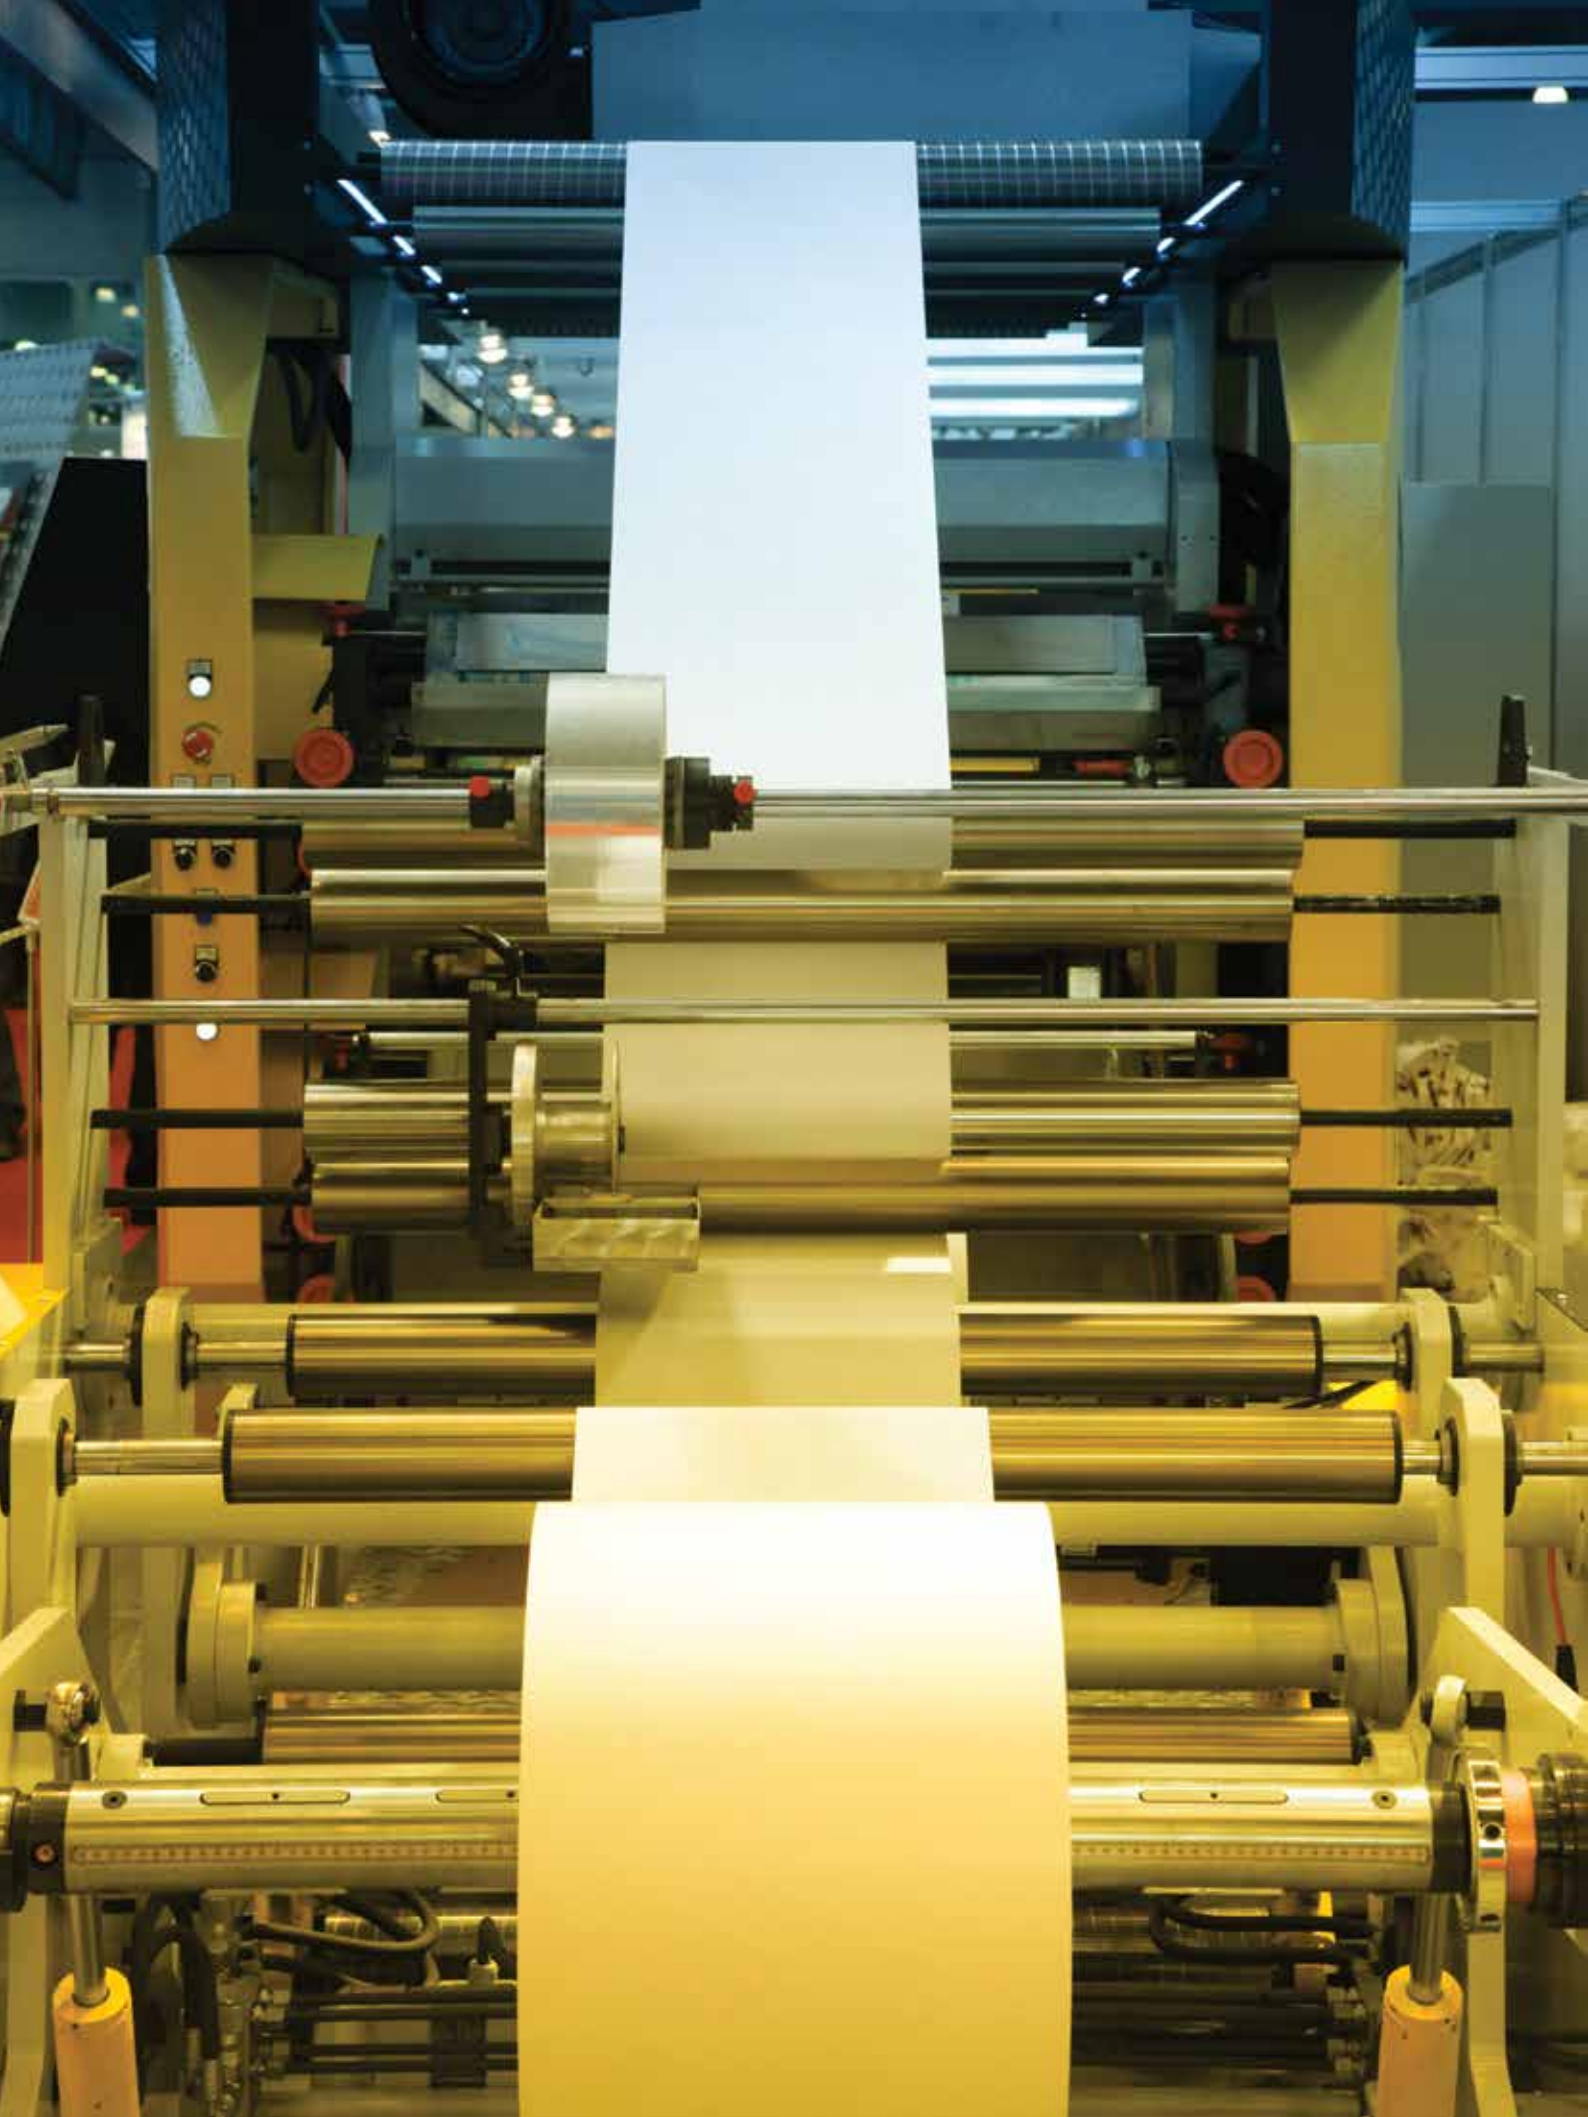

Unidrive M range - Identification

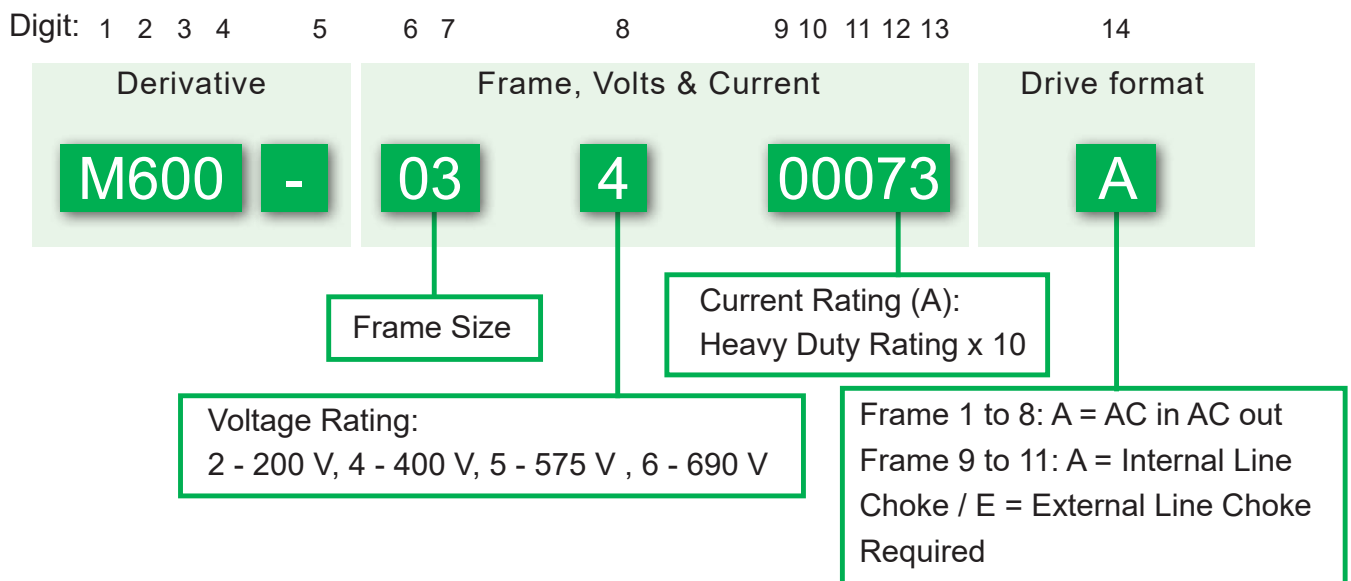

For configurations involving frame size 9 and above refer to the high power brochure

CONTROL TECHNIQUES™

www.controltechniques.com

Connect with us at:

LinkedIn - Nidec Control Techniques

twitter.com/Nidec_CT

facebook.com/NidecControlTechniques

youtube.com/c/nideccontroltechniques

theautomationengineer.com (blog)



© 2017 Nidec Control Techniques Limited. The information contained in this brochure is for guidance only and does not form part of any contract. The accuracy cannot be guaranteed as Nidec Control Techniques Ltd have an ongoing process of development and reserve the right to change the specification of their products without notice.

Nidec Control Techniques Limited. Registered Office: The Gro, Newtown, Powys SY16 3BE. Registered in England and Wales. Company Reg. No. 01236886.